


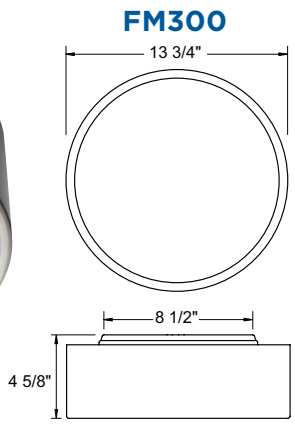
- Available in LED & Incandescent
- Direct/Indirect Light
- Ceiling Mount Only
- 3 Mounting Options
- UL Listed for Damp Locations
- Standard Pack QTY: 6

MALIBU


SURFACE MOUNT




FM300





OPTIONAL MOUNTING KITS
(sold separately - assembly required)




KIT-FM301
36" Max Cable Kit



KIT-FM302
6" / 13" Pendant Kit

RoHS compliant



EXAMPLE # FM300-LE1200W-NWMP

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FM300	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR	N -Brushed Nickel	ACRYLIC W -White	M -Motion Sensor C -36" Max Cable Kit (KIT-FM301) D -6"/13" Pendant Kit (KIT-FM302)
	LE1200 - 14W Power Input CRI 80 (TYP) >80 Lumens Per Watt**			
	LE1800 - 23W Power Input CRI 80 (TYP) >80 Lumens Per Watt**			
	INCANDESCENT, MEDIUM BASE, 120V I240-2 X 40W Max	N -Brushed Nickel	ACRYLIC W -White	LED LAMP, 3 YEAR WARRANTY DIMMABLE, ENERGY STAR LWE -A19/E26, 2700K LCE -A19/E26, 4000K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST **ESTIMATED FROM LED SOURCE



Scan the QR code to the left to access the Energy Star qualified product list.

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.

For more information contact our sales department at 1-800-325-7364 or visit www.interglobal-inc.com