


- Available in LED, Incandescent & GU24
- Molded of Durable Non-Corrosive UV Resistant Resins
- Fits Most 3" Diameter Posts
- UL Listed for Wet Locations
- Standard Pack QTY: 1

## NAUTICAL



FN252

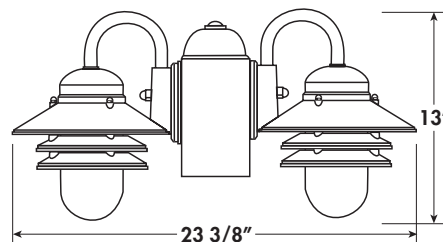

RoHS compliant

### EXAMPLE # FN252-I260-BW-PLWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FN252	<p>EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE</p> <p><b>LE1600</b> - 2 X 13W Power Input      <b>W</b>-1800lm 3000K                      CRI 80 (TYP)                              <b>C</b>-2000lm 4000K                      &gt;65 Lumens Per Watt**</p>	<p><b>W</b>-White <b>B</b>- Black</p>	<p>ACRYLIC <b>C</b>-Clear Prism <b>W</b>-White</p>	<p><b>P</b>-Photocell</p>
	<p>MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY</p> <p><b>L1800</b> - 22W Power Input              <b>C</b>-1824lm 4000K                      CRI 74 (TYP)                      &gt;82 Lumens Per Watt**</p>	<p><b>W</b>-White <b>B</b>- Black</p>	<p>ACRYLIC <b>W</b>-White</p>	<p><b>P</b>-Photocell</p>
	<p>INCANDESCENT, MEDIUM BASE, 120V</p> <p><b>I260</b>- 2 X 60W</p>	<p><b>W</b>-White <b>B</b>- Black</p>	<p>POLYCARBONATE <b>C</b>-Clear Prism <b>W</b>-White</p>	<p><b>P</b>-Photocell LED LAMP, 3 YEAR WARRANTY, DIMMABLE <b>LW</b>-A19/E26, 2700K <b>LC</b>-A19/E26, 4000K</p>
	<p>GU24 BASE, 120V</p> <p><b>G213</b>-2 X 13W <b>G218</b>-2 X 18W <b>G223</b>-2 X 23W</p>	<p><b>W</b>-White <b>B</b>- Black</p>	<p>ACRYLIC <b>C</b>-Clear Prism <b>W</b>-White</p>	<p><b>L</b>-CFL, 2700K</p>

\*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

\*\*ESTIMATED FROM LED SOURCE

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.