


- o Available in LED
- o Brushed Nickel Frame
- o Frosted Glass Diffuser
- o Wall Mount Only
- o UL Listed for Damp Locations
- o Standard Pack QTY: 4

GIAVANI




FWSBN

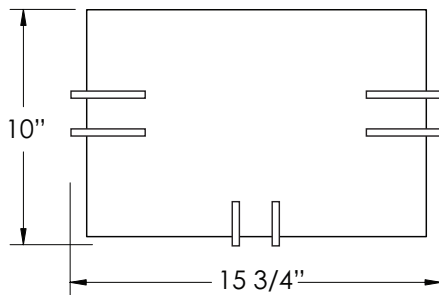

EXTENDS: 4"
HCMT: 6 1/2"



FWVBN

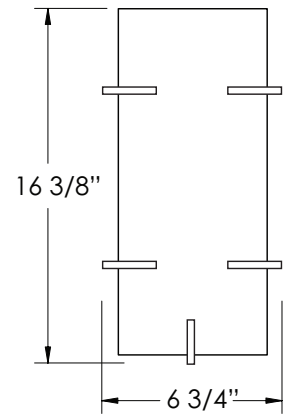

EXTENDS: 4"
HCMT: 8 3/8"



EXAMPLE # FWVBN-L1700W

STYLE #

LIGHT SOURCE

FWSBN
FWVBN

MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY

L1700 - 22W Power Input **W-1704lm** 3000K
CRI 80 (TYP)
>77 Lumens Per Watt**

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST **ESTIMATED FROM LED SOURCE

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.

For more information contact our sales department at 1-800-325-7364 or visit www.interglobal-inc.com