


- Available in LED & Incandescent
- White Powder Coated Aluminum
- Ceiling Mount Only
- UL Listed for Damp Locations
- Standard Pack QTY: 6

14" DOME



FD334

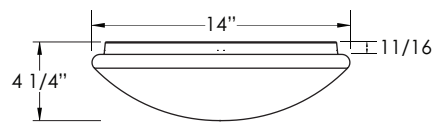

RoHS compliant



EXAMPLE # FD334-I240-WW-LWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FD334	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR	W -White	ACRYLIC W -White	M -Motion Sensor
	LE800 - 13W Power Input CRI 80 (TYP) >65 Lumens Per Watt**	W -900lm 3000K C -1000lm 4000K		
	LE1200 - 14W Power Input CRI 80 (TYP) >80 Lumens Per Watt**	W -1350lm 3000K C -1400lm 4000K		
	LE1800 - 23W Power Input CRI 80 (TYP) >80 Lumens Per Watt**	W -1850lm 3000K C -1900lm 4000K		
	INCANDESCENT, MEDIUM BASE, 120V I240-2 X 40W Max	W -White	ACRYLIC W -White	LED LAMP, 3 YEAR WARRANTY DIMMABLE, ENERGY STAR LWE -A19/E26, 2700K LCE -A19/E26, 4000K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST **ESTIMATED FROM LED SOURCE



Scan the QR code to the left to access the Energy Star qualified product list.

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.

For more information contact our sales department at 1-800-325-7364 or visit www.interglobal-inc.com