


- Available in LED, Incandescent & GU24
- Molded of Durable Non-Corrosive UV Resistant Resins
- Wall Mount Only
- UL Listed for Wet Locations
- Standard Pack QTY: 6

### TUDOR WALL



**FT131**

1 PIECE BASE  
HCMT: 10 1/2"

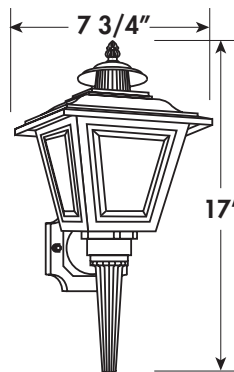

EXTENDS: 8"



RoHS  
compliant



#### EXAMPLE # FT131-I60-BW-PTLWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
<b>FT131</b>	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR	<b>W</b> -White <b>B</b> -Black	<b>ACRYLIC</b> <b>C</b> -Clear <b>W</b> -White <b>F</b> - Glare Free Frost	<b>P</b> -Photocell <b>T</b> - Brass Finial
	<b>LE800</b> -13W Power Input CRI 80 (TYP) >65 Lumens Per Watt**	<b>W</b> -900lm 3000K <b>C</b> -1000lm 4000K		
	<b>INCANDESCENT, MEDIUM BASE, 120V</b> <b>I60</b> -1 X 60W Max	<b>W</b> -White <b>B</b> -Black	<b>ACRYLIC</b> <b>C</b> -Clear <b>W</b> -White <b>F</b> - Glare Free Frost	<b>P</b> -Photocell <b>T</b> - Brass Finial  <b>LED LAMP, 3 YEAR WARRANTY DIMMABLE, ENERGY STAR </b> <b>LWE</b> -A19/E26, 2700K <b>LCE</b> -A19/E26, 4000K
<b>GU24 BASE, 120V</b> <b>G13</b> -1 X 13W <b>G18</b> -1 X 18W <b>G23</b> -1 X 23W <b>G26</b> -1 X 26W or 27W	<b>W</b> -White <b>B</b> -Black	<b>ACRYLIC</b> <b>C</b> -Clear <b>W</b> -White <b>F</b> - Glare Free Frost	<b>P</b> -Photocell <b>T</b> - Brass Finial <b>L</b> -CFL, 2700K	

\*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

\*\*ESTIMATED FROM LED SOURCE



Scan the QR code to the left to access the Energy Star qualified product list.

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.

For more information contact our sales department at 1-800-325-7364 or visit [www.interglobal-inc.com](http://www.interglobal-inc.com)