


- Available in LED, Incandescent & GU24
- Molded of Durable Non-Corrosive UV Resistant Resins
- Wall Mount Only
- UL Listed for Wet Locations
- Standard Pack QTY: 1

AMHERST WALL




FA192

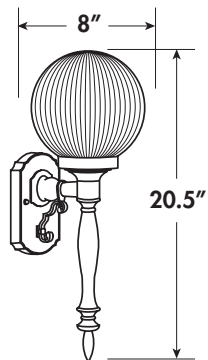

EXTENDS: 9"
HCMT: 11 1/8"



FA193



EXTENDS: 9"
HCMT: 11 1/8"



RoHS compliant



EXAMPLE # FA192-175-BW-PLWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FA192 FA193	INCANDESCENT, MEDIUM BASE, 120V I75-1 X 75W Max	W -White B - Black	ACRYLIC C -Clear Prism W - White	P - Photocell LED LAMP, 3 YEAR WARRANTY DIMMABLE, ENERGY STAR LWE -A19/E26, 2700K LCE -A19/E26, 4000K
	GU24 BASE, 120V G13 -1 X 13W G18 -1 X 18W G23 -1 X 23W G26 -1 X 26W or 27W	W -White B - Black	ACRYLIC C -Clear Prism W - White	L -CFL, 2700K P - Photocell

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

**ESTIMATED FROM LED SOURCE



Scan the QR code to the left to access the Energy Star qualified product list.

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.