


- Available in LED, Incandescent & GU24
- Molded of Durable Non-Corrosive UV Resistant Resins
- Fits Most 3" Diameter Posts
- UL Listed for Wet Locations
- Standard Pack QTY: 1

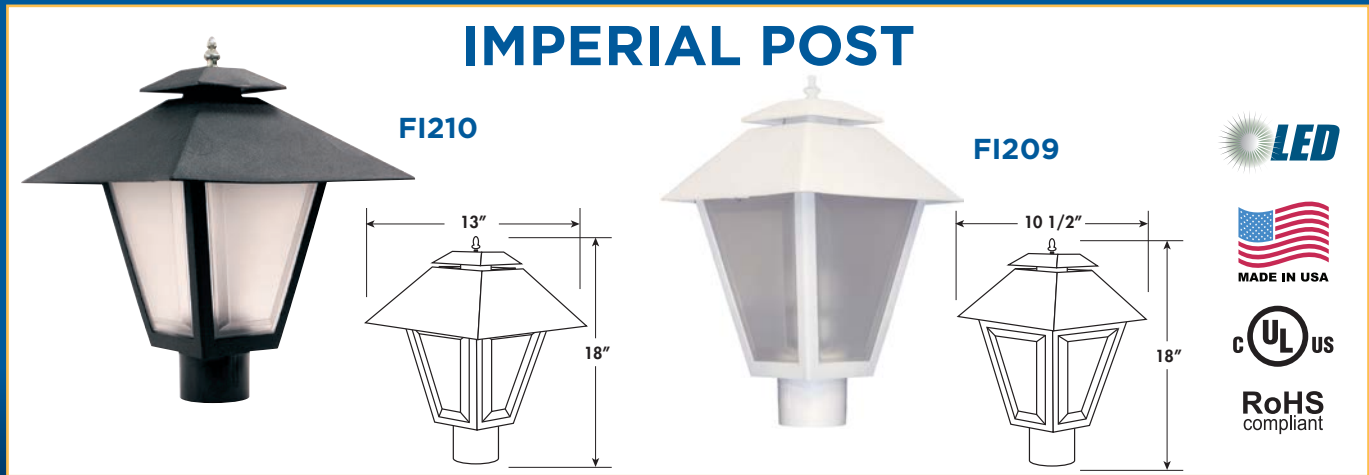

## EXAMPLE # FI210-I100-BC-GTLWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
<b>FI209</b> <b>FI210</b>	<p>EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE</p> <p><b>LE800</b> - 13W Power Input      <b>W</b>-900lm 3000K CRI 80 (TYP)                      <b>C</b>-1000lm 4000K &gt;65 Lumens Per Watt**</p> <p><b>LE1200</b> - 14W Power Input      <b>W</b>-1350lm 3000K CRI 80 (TYP)                      <b>C</b>-1400lm 4000K &gt;80 Lumens Per Watt**</p> <p><b>LE1800</b> - 23W Power Input      <b>W</b>-1850lm 3000K CRI 80 (TYP)                      <b>C</b>-1900lm 4000K &gt;80 Lumens Per Watt**</p>	<p><b>W</b>-White <b>B</b>- Black</p>	<p><b>ACRYLIC</b> <b>C</b>-Clear <b>F</b>- Glare Free Frost</p>	<p><b>G</b>-Glass Chimney Frosted <b>T</b>- Brass Finial</p>
	<p><b>INCANDESCENT, MEDIUM BASE, 120V</b> <b>I100</b>- 1 X 100W Max</p>	<p><b>W</b>-White <b>B</b>- Black</p>	<p><b>ACRYLIC</b> <b>C</b>-Clear <b>F</b>- Glare Free Frost</p>	<p><b>G</b>-Glass Chimney Frosted <b>T</b>- Brass Finial</p> <p>LED LAMP, 3 YEAR WARRANTY, DIMMABLE <b>LW</b>-A19/E26, 2700K <b>LC</b>-A19/E26, 4000K</p>
	<p><b>GU24 BASE, 120V</b> <b>G13</b>-1 X 13W <b>G213</b>- 2 X 13W <b>G18</b>-1 X 18W <b>G218</b>- 2 X 18W</p>	<p><b>W</b>-White <b>B</b>-Black</p>	<p><b>ACRYLIC</b> <b>C</b>-Clear <b>F</b>- Glare Free Frost</p>	<p><b>G</b>-Glass Chimney Frosted <b>T</b>- Brass Finial <b>L</b>-CFL, 2700K</p>

\*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

\*\*ESTIMATED FROM LED SOURCE

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.