


- Available in LED, Incandescent & GU24
- Molded of Durable Non-Corrosive UV Resistant Resins
- Fits Most 3" Diameter Posts
- UL Listed for Wet Locations
- Standard Pack QTY: 1

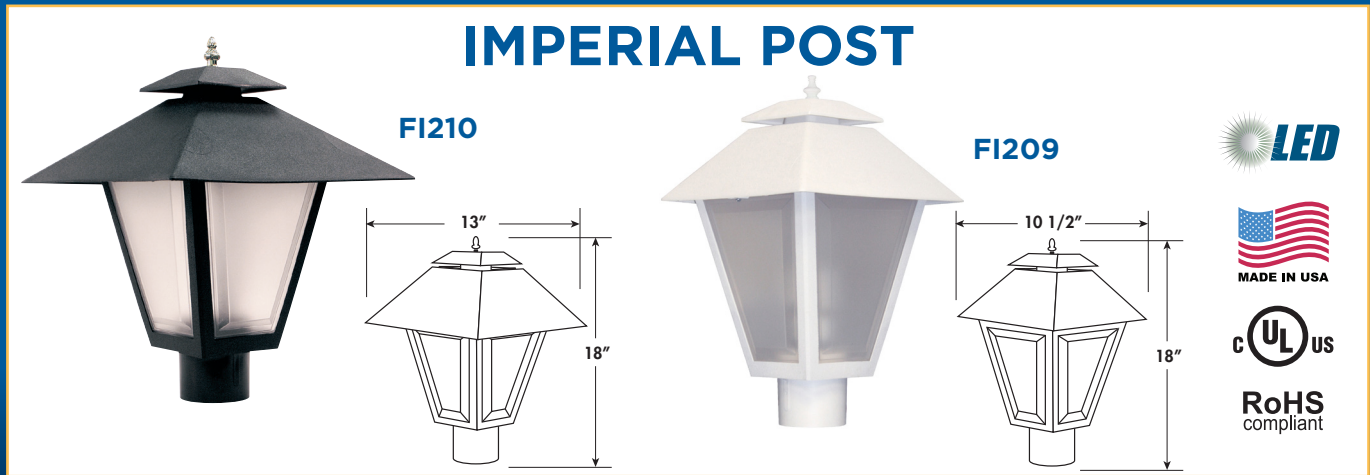

EXAMPLE # FI210-I100-BC-GTLWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FI209 FI210	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE LE800 - 13W Power Input W-900lm 3000K CRI 80 (TYP) C-1000lm 4000K >65 Lumens Per Watt** LE1200 - 14W Power Input W-1350lm 3000K CRI 80 (TYP) C-1400lm 4000K >80 Lumens Per Watt** LE1800 - 23W Power Input W-1850lm 3000K CRI 80 (TYP) C-1900lm 4000K >80 Lumens Per Watt**	W-White B- Black	ACRYLIC C-Clear F- Glare Free Frost	G-Glass Chimney Frosted T- Brass Finial
	INCANDESCENT, MEDIUM BASE, 120V I100- 1 X 100W Max	W-White B- Black	ACRYLIC C-Clear F- Glare Free Frost	G-Glass Chimney Frosted T- Brass Finial LED LAMP, 3 YEAR WARRANTY, DIMMABLE LWE-A19/E26, 2700K LCE-A19/E26, 4000K
	GU24 BASE, 120V G13-1 X 13W G18-1 X 18W G23-1 X 23W G26-1 X 26W or 27W	W-White B-Black	ACRYLIC C-Clear F- Glare Free Frost	G-Glass Chimney Frosted T- Brass Finial L-CFL, 2700K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

**ESTIMATED FROM LED SOURCE

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.