
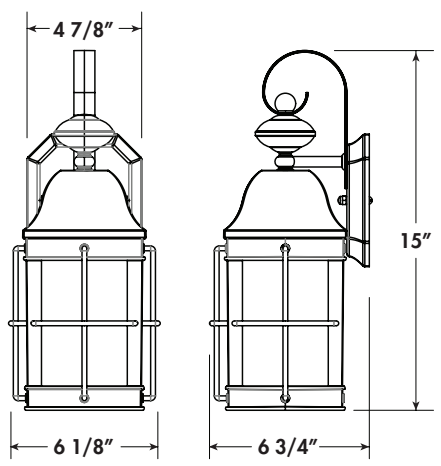


- o Available in LED, Incandescent & GU24
- o Molded of Durable Non-Corrosive UV Resistant Resins
- o Wall Mount
- o UL Listed for Wet Locations
- o Standard Pack QTY: 6

### STAGECOACH



**FR121**








4 7/8"

6 1/8"

6 3/4"

15"

HCMT: 6 1/2"

#### EXAMPLE # FR121-LE800C-BCP

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
<b>FR121</b>	<p>EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR</p> <p><b>LE800</b>-13W Power Input      <b>W</b>-900lm 3000K                      CRI 80 (TYP)                              <b>C</b>-1000lm 4000K                      &gt;65 Lumens Per Watt**</p>	<p><b>B</b>-Black  <b>W</b>-White  <b>Z</b>-Bronze</p>	<p><b>ACRYLIC</b>  <b>F</b>-Glare Free Frost</p>	<p><b>P</b>-Photocell</p>
	<p>INCANDESCENT, MEDIUM BASE, 120V  <b>I60</b>-1 X 60W Max</p>	<p><b>B</b>-Black  <b>W</b>-White  <b>Z</b>-Bronze</p>	<p><b>ACRYLIC</b>  <b>F</b>-Glare Free Frost</p>	<p><b>LED LAMP, 3 YEAR WARRANTY DIMMABLE, ENERGY STAR</b>  <b>LWE</b>-A19/E26, 2700K  <b>LCE</b>-A19/E26, 4000K</p>
	<p>GU24 BASE, 120V  <b>G13</b>-1 X 13W  <b>G18</b>-1 X 18W  <b>G23</b>-1 X 23W</p>	<p><b>B</b>-Black  <b>W</b>-White  <b>Z</b>-Bronze</p>	<p><b>ACRYLIC</b>  <b>F</b>-Glare Free Frost</p>	<p><b>L</b>-CFL, 2700K</p>

\*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

\*\*ESTIMATED FROM LED SOURCE



Scan the QR code to the left to access the Energy Star qualified product list.

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.

For more information contact our sales department at **1-800-325-7364** or visit [www.interglobal-inc.com](http://www.interglobal-inc.com)