


- Available in LED, Incandescent & GU24
- Molded of Durable Non-Corrosive UV Resistant Resins
- Wall Mount Only
- UL Listed for Wet Locations
- Standard Pack QTY: 1

GLASS CHIMNEY WALL



SHOWN WITH
OPTIONAL
GLASS CHIMNEY

FT171

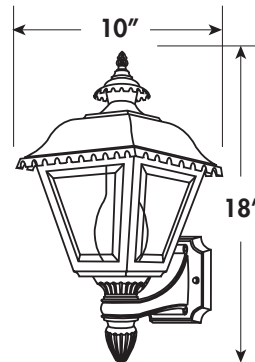

EXTENDS: 10 1/4"
HCMT: 15"



RoHS
compliant



EXAMPLE # FT171-I75-BC-GTLWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FT171	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR	B-Black	ACRYLIC C-Clear F- Glare Free Frost	G- Glass Chimney Frosted T- Brass Finial
	LE800-13W Power Input W-900lm 3000K CRI 80 (TYP) C-1000lm 4000K >65 Lumens Per Watt**			
	INCANDESCENT, MEDIUM BASE, 120V I75-1 X 75W Max			
	GU24 BASE, 120V G13-1 X 13W G18-1 X 18W G23-1 X 23W G26-1 X 26W or 27W		ACRYLIC C-Clear F- Glare Free Frost	G- Glass Chimney Frosted T-Brass Finial LED LAMP, 3 YEAR WARRANTY DIMMABLE, ENERGY STAR LWE-A19/E26, 2700K LCE-A19/E26, 4000K
		B-Black	ACRYLIC C-Clear F- Glare Free Frost	G- Glass Chimney Frosted T-Brass Finial L-CFL, 2700K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

**ESTIMATED FROM LED SOURCE



Scan the QR code to the left to access the Energy Star qualified product list.

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.

For more information contact our sales department at 1-800-325-7364 or visit www.interglobal-inc.com