


- Available in LED, Incandescent & GU24
- Molded of Durable Non-Corrosive UV Resistant Resins
- Fits Most 3" Diameter Posts
- UL Listed for Wet Locations
- Standard Pack QTY: 1

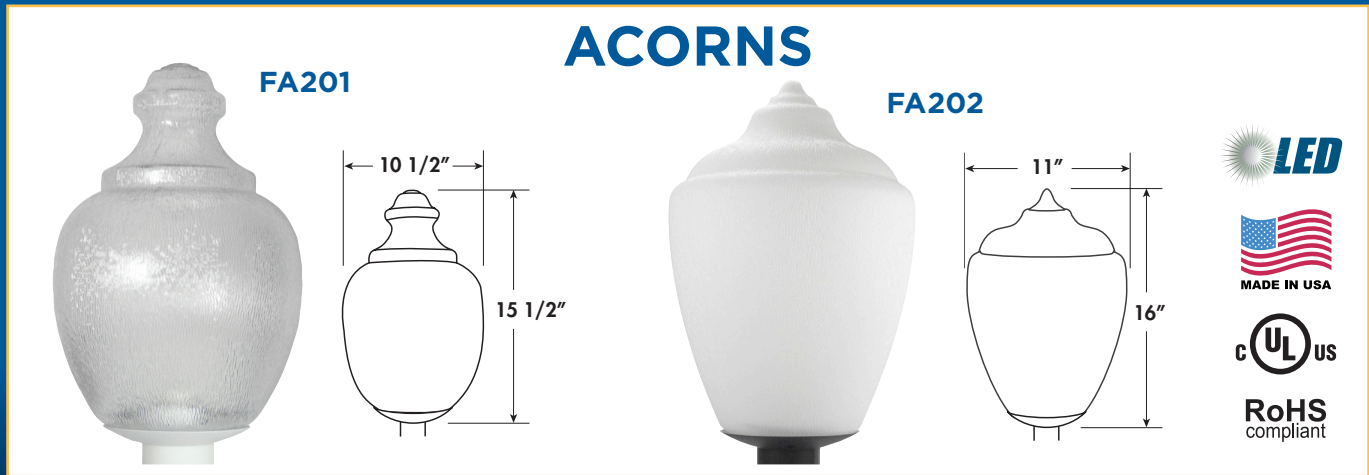

### EXAMPLE # FA201-G13-BCL

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS	
FA201 FA202	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE	W-White B- Black	ACRYLIC A-Clear Textured POLYCARBONATE C-Clear Textured POLYETHYLENE W-White Textured	N/A	
	LE800 - 13W Power Input CRI 80 (TYP) >65 Lumens Per Watt**				W-900lm 3000K C-1000lm 4000K
	LE1200 - 14W Power Input CRI 80 (TYP) >80 Lumens Per Watt**				W-1350lm 3000K C-1400lm 4000K
	LE1800 - 23W Power Input CRI 80 (TYP) >80 Lumens Per Watt**				W-1850lm 3000K C-1900lm 4000K
	INCANDESCENT, MEDIUM BASE, 120V I150-1 X 150W Max	W-White B- Black	ACRYLIC A-Clear Textured POLYCARBONATE C-Clear Textured POLYETHYLENE W-White Textured	LED LAMP, 3 YEAR WARRANTY, DIMMABLE LWE-A19/E26, 2700K LCE-A19/E26, 4000K	
	GU24 BASE, 120V G13-1 X 13W G18-1 X 18W G23-1 X 23W G26-1 X 26W or 27W G32- 1 X 32W G42- 1 X 42W	W-White B- Black	ACRYLIC A-Clear Textured POLYCARBONATE C-Clear Textured POLYETHYLENE W-White Textured	L-CFL, 2700K	

\*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

\*\*ESTIMATED FROM LED SOURCE

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.

For more information contact our sales department at 1-800-325-7364 or visit [www.interglobal-inc.com](http://www.interglobal-inc.com)