


- Available in LED & Incandescent
- White Powder Coated Aluminum
- Ceiling Mount Only
- Multi-Volt LED Available
- UL Listed for Damp Locations
- Standard Pack QTY: 8

## 11" DRUM

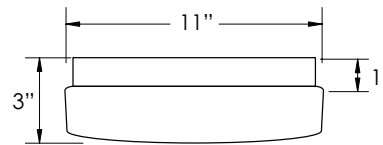

11" DRUM

FD311



RoHS compliant



### EXAMPLE # FD311-LE800W-WWM

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FD311	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR***	W-White	ACRYLIC W-White	M-Motion Sensor
	<b>LE800</b> - 13W Power Input <b>W</b> -900lm 3000K CRI 80 (TYP) <b>C</b> -1000lm 4000K >65 Lumens Per Watt**			
	<b>LE1200</b> - 14W Power Input <b>W</b> -1350lm 3000K CRI 80 (TYP) <b>C</b> -1400lm 4000K >80 Lumens Per Watt**			
	<b>LE1800</b> - 23W Power Input <b>W</b> -1850lm 3000K CRI 80 (TYP) <b>C</b> -1900lm 4000K >80 Lumens Per Watt**			
	MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY	W-White	ACRYLIC W-White	M-Motion Sensor
	<b>L1300</b> - 17W Power Input <b>W</b> -1278lm 3000K CRI 80 (TYP) >75 Lumens Per Watt**			
	INCANDESCENT, MEDIUM BASE, 120V	W-White	ACRYLIC W-White	LED LAMP, 3 YEAR WARRANTY, DIMMABLE ENERGY STAR
	<b>I40-1</b> X 40W Max			<b>LWE</b> -A19/E26, 2700K <b>LCE</b> -A19/E26, 4000K

\*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST    \*\*ESTIMATED FROM LED SOURCE    \*\*\*EXCLUDES LE1800 MODEL



Scan the QR code to the left to access the Energy Star qualified product list.

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.