


- Available in LED & Incandescent
- White Powder Coated Aluminum
- Ceiling Mount Only
- Multi-Volt LED Available
- UL Listed for Damp Locations
- Standard Pack QTY: 6

14" DRUM

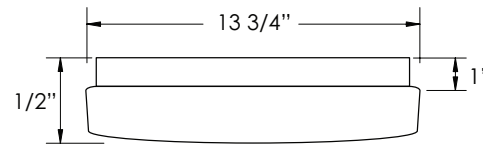

14" DRUM

FD314



RoHS compliant



EXAMPLE # FD314-I240-WW-LWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS	
FD314	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR	W-White	ACRYLIC W-White	M-Motion Sensor	
	LE800 - 13W Power Input CRI 80 (TYP) >65 Lumens Per Watt**				W-900lm 3000K C-1000lm 4000K
	LE1200 - 14W Power Input CRI 80 (TYP) >80 Lumens Per Watt**				W-1350lm 3000K C-1400lm 4000K
FD314	MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY, ENERGY STAR	W-White	ACRYLIC W-White	M-Motion Sensor	
	L1700 - 22W Power Input CRI 80 (TYP) >82 Lumens Per Watt**				W-1704lm 3000K
FD314	INCANDESCENT, MEDIUM BASE, 120V I240-2 X 40W Max	W-White	ACRYLIC W-White	LED LAMP, 3 YEAR WARRANTY, DIMMABLE ENERGY STAR LWE-A19/E26, 2700K LCE-A19/E26, 4000K	

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST **ESTIMATED FROM LED SOURCE



Scan the QR code to the left to access the Energy Star qualified product list.

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.

For more information contact our sales department at 1-800-325-7364 or visit www.interglobal-inc.com