

EOS LED LAMP

- AC Driver-On-Board Technology
- Multiple Mounting Options
- Data Per NVLAP Accredited Laboratory
- Electronic Dimming (see page 24)
- Energy Star CSD
- 5 Year Limited Warranty*



SPECIFICATIONS


- Input Voltage: 120VAC; 50/60Hz
- 12 Watt
- Available in 3000K or 4000K
- Constant current design
- High power factor > 0.90
- Estimated 50,000 hrs L70
- Optical grade polycarbonate lens
- On board line surge protection
- Can be used to comply with 2016 Title 24 part 6 High Efficacy LED Light Source Requirements - JA8-2016
- Optional supplemental surge protection
- 18" 18 AWG Leads
- UL file: E464765 Certified under UL Standard 8750
- FCC compliance Class B

LUMENS & CCT @ 90CRI

12W 120V EOS LAMP
1020lm, 3000K = 85lm/W
1040lm, 4000K = 87lm/W

Photometrics available on request

Mounting Options

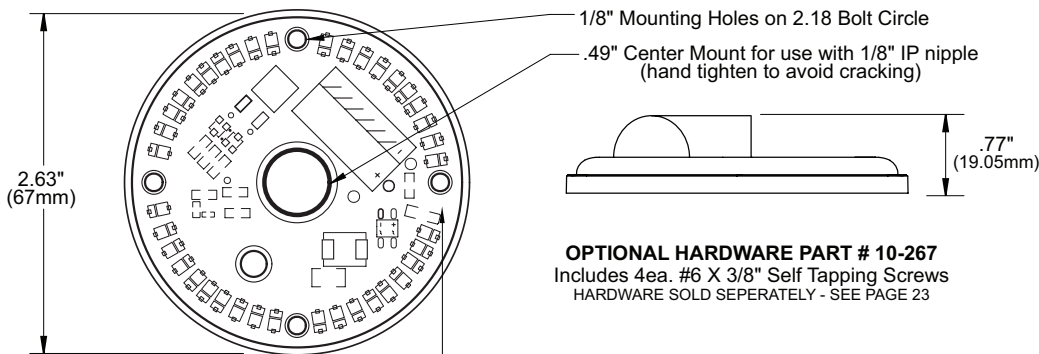

OPTIONAL HARDWARE PART # 10-267
Includes 4ea. #6 X 3/8" Self Tapping Screws
HARDWARE SOLD SEPERATELY - SEE PAGE 23

1598C Retrofit Kits, Heat Sinks, & Supplemental Surge Protection Available. Contact Inter-Global for more information

IMPORTANT

***PRODUCT MUST BE INSTALLED WITH PROPER HEAT DISSIPATION. LED-MOV1 REQUIRED FOR OUTDOOR APPLICATIONS.**

SEE UL TERMS OF ACCEPTABILITY ON PAGE 25 PRIOR TO INSTALLATION.

HEAT SINK NOT INCLUDED

PART NUMBER GUIDE

L08 - AC120 - 2R9C - W

L08 12W

AC120 120V INPUT VOLTAGE
90CRI

2.5" DIA ROUND

W 3000K
C 4000K