

MOGUL BASE PORCELAIN LAMPHOLDERS



Series 570B 4kV Porcelain Lampholder

- Glazed or unglazed porcelain, 4kV pulse rating with lamp grips and 2 8-32 bushings on 1 3/8 inch centers.
- Standard lead types are AWM 16 gauge type SF-2 wire.
- Standard screw shells are nickel plated brass.
- Open or closed wireway porcelain body.
- Standard packed 100 to a carton.

UR, CUR Recognized, 1500W, 600V 
Non-stocked, Special Order, Call for details



1/4 or 3/8 NPT
END CAPS AVAILABLE

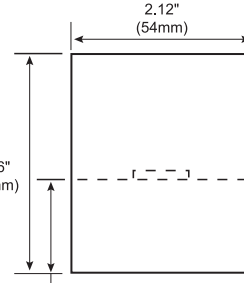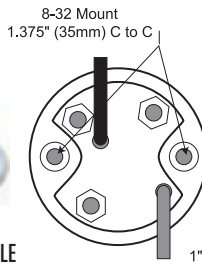

1" (25mm) TO DEPRESSED CENTER CONTACT





Series 571 4kV Porcelain Lampholder

- Glazed or unglazed porcelain base with lamp grips and 2 8-32 screws for mounting.
- Standard lead types are AWM 16 gauge type SF-2 wire.
- Standard screw shells are nickel plated brass.
- Open or closed wireway porcelain body.
- Standard packed 100 to a carton.

UL and CUL listed, 1500W, 600V 
Non-stocked, Special Order, Call for details



1/4 or 3/8 NPT
END CAPS AVAILABLE

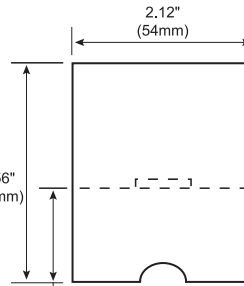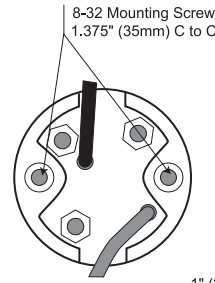


1" (25mm) TO DEPRESSED CENTER CONTACT




- SERIES 570U & 571U
- FOR OPEN RATED METAL HALIDE LAMPS
- 4kV PULSE RATING
- GRIP LOCKS

U.S. Patent No. 7,178,969



Lamp contact does not make contact with the lampholder.



Inner wall in lampholder allows only Open Rated Lamp use.

Series 570U 4kV Porcelain Lampholder



- Glazed porcelain, 4kV pulse rating with 2 8-32 screws on 34.93mm centers.
- Standard lead types are AWM 14 gauge type SF-2 wire.
- Nickel plated brass screw shell with lamp grips.
- 600V, 1500W
- Standard packed 50 to a carton.

UL, CUL Listed, 1500W, 600V 

Non-stocked, Special Order, Call for details



1/4 or 3/8 NPT
END CAPS AVAILABLE



1" (25mm) TO DEPRESSED CENTER CONTACT



Series 571U 4kV Porcelain Lampholder



- Glazed porcelain, 4kV pulse rating with 2 8-32 bushings on 34.93mm centers.
- Standard lead types are AWM 14 gauge type SF-2 wire.
- Nickel plated brass screw shell with lamp grips.
- 600V, 1500W
- Standard packed 50 to a carton.

UR, CUR Recognized, 1500W, 600V 

Non-stocked, Special Order, Call for details



1/4 or 3/8 NPT
END CAPS AVAILABLE



1" (25mm) TO DEPRESSED CENTER CONTACT



MOGUL BASE PORCELAIN LAMPHOLDERS

NEW DESIGN MOGUL SOCKET

- SERIES 670 & 671
- GRIP LOCK & POSITION ORIENTED IN 1 MODEL
- 5kV PULSE RATING



Series 670 5kV Porcelain Lampholder


- Glazed or unglazed porcelain, 5kV pulse rating with 2 8-32 bushings on 34.93mm centers.
- Standard lead types are AWM 14 gauge type SF-2 wire.
- Nickel plated brass screw shell with lamp grips. Also suitable for position oriented lamp (see illustration above).
- 600V, 1500W
- Standard packed 50 to a carton.

UR, CUR Recognized, 1500W, 600V



1/4 or 3/8 NPT
END CAPS AVAILABLE

Non-stocked, Special Order, Call for details

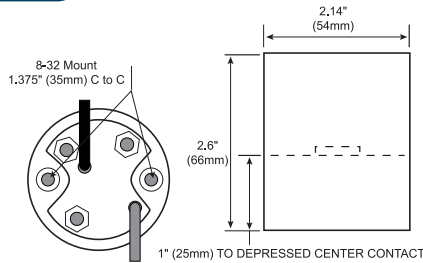

Series 671 5kV Porcelain Lampholder

- Glazed or unglazed porcelain, 5kV pulse rating with 2 8-32 screws on 34.93mm centers.
- Standard lead types are AWM 14 gauge type SF-2 wire.
- Nickel plated brass screw shell with lamp grips. Also suitable for position oriented lamp (see illustration above).
- 600V, 1500W
- Standard packed 50 to a carton.

UL, CUL Listed, 1500W, 600V



1/4 or 3/8 NPT
END CAPS AVAILABLE

Non-stocked, Special Order, Call for details

