


- Mounting Hardware Included
- Fade & Rust Resistant Composite Construction
- Black, White, or Bronze
- Optional Photocell
- UL Listed for Wet Locations

ASTON



FP171

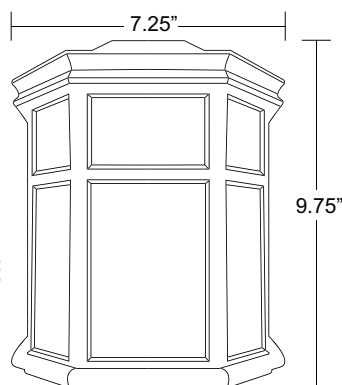

EXTENDS:
4"
H/CTR:
5 1/2"
BACKPLATE:
7 1/4" X 9 1/2"



EXAMPLE # FP171-I60-ZF-LWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FP171	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE LL900 - 10W, 80 CRI >90 Lumens Per Watt** W -930lm 3000K C -970lm 4000K	B -Black W -White Z -Bronze	ACRYLIC F -Glare Free Frost	P -Photocell M -Motion Sensor options cannot be combined
	INCANDESCENT, MEDIUM BASE, 120V I40-1 X 40W Max			P -Photocell LED LAMP, 3 YEAR WARRANTY DIMMABLE LWE -A19/E26, 80CRI, 3000K LCE -A19/E26, 80CRI, 4000K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

**ESTIMATED FROM LED SOURCE

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.

For more information contact our sales department at 1-800-325-7364 or visit www.interglobal-inc.com