


- Mounting Hardware Included
- Fade & Rust Resistant Composite Construction
- Black, White, or Bronze
- Optional Photocell
- UL Listed for Wet Locations

## MARTIN

FP161



8.25"

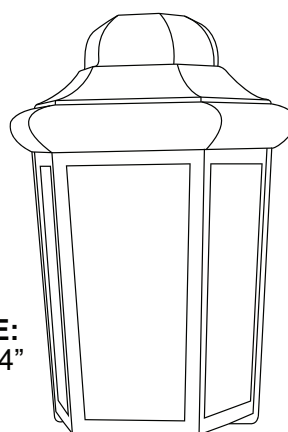

12.25"

**EXTENDS:**  
4"  
**H/CTR:**  
5 1/2"  
**BACKPLATE:**  
6 1/2" x 10 3/4"



### EXAMPLE # FP161-I60-ZF-LWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FP161	<b>EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE</b> <b>LL900</b> - 10W, 80 CRI >90 Lumens Per Watt** <b>W</b> -920lm 3000K <b>C</b> -975lm 4000K	<b>B</b> -Black <b>W</b> -White <b>Z</b> -Bronze	<b>ACRYLIC</b> <b>F</b> -Glare Free Frost	<b>P</b> -Photocell <b>M</b> -Motion Sensor options cannot be combined
	<b>INCANDESCENT, MEDIUM BASE, 120V</b> <b>I40-1 X 40W Max</b>			<b>P</b> -Photocell <b>LED LAMP, 3 YEAR WARRANTY DIMMABLE</b> <b>LWE</b> -A19/E26, 80CRI, 3000K <b>LCE</b> -A19/E26, 80CRI, 4000K

\*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

\*\*ESTIMATED FROM LED SOURCE

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.