



- Available in LED & Incandescent
- Fade & Rust Resistant Composite Construction
- Black, White, or Bronze
- Optional Photocell
- UL Listed for Wet Locations

## HUTTON - SMALL

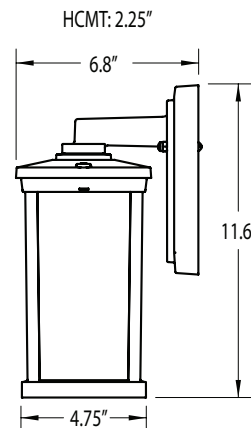

FH145



### EXAMPLE # FH145-I60-ZF-LWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FH145	<b>EOS LED</b> 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR	<b>B</b> -Black <b>W</b> -White <b>Z</b> -Bronze	<b>ACRYLIC</b> <b>F</b> -Glare Free Frost	<b>P</b> -Photocell
	<b>LE800</b> - 13W, 80 CRI <b>W</b> -1140lm 3000K >88 Lumens Per Watt** <b>C</b> -1280lm 4000K			
	<b>INCANDESCENT, MEDIUM BASE, 120V</b> <b>I60-1 X 60W Max</b>	<b>B</b> -Black <b>W</b> -White <b>Z</b> -Bronze	<b>ACRYLIC</b> <b>F</b> -Glare Free Frost	<b>P</b> -Photocell <b>LED LAMP, 3 YEAR WARRANTY</b> DIMMABLE, ENERGY STAR <b>LWE</b> -A19/E26, 80CRI, 3000K <b>LCE</b> -A19/E26, 80CRI, 4000K

\*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

\*\*ESTIMATED FROM LED SOURCE

90CRI OPTIONS AVAILABLE - SEE PAGE 112 FOR DIMMER COMPATIBILITY

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.