


- Available in LED, Incandescent & GU24
- Fade & Rust Resistant Composite Construction
- Fits Most 3" Diameter Posts
- UL Listed for Wet Locations
- Standard Pack QTY: 1

NAUTICAL



FN252

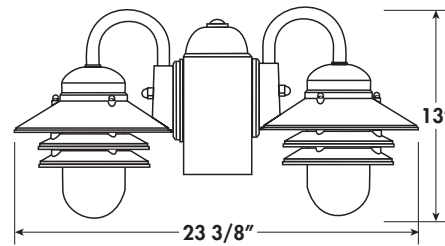

RoHS compliant

EXAMPLE # FN252-I260-BW-PLWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FN252	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE LE1600 - 2 X 13W Power Input W -1800lm 3000K 80 CRI C -2000lm 4000K >65 Lumens Per Watt**	W -White B - Black	ACRYLIC C -Clear Prism W -White	P -Photocell
	MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY L1800 - 22W Power Input C -1824lm 4000K CRI 74 (TYP) >82 Lumens Per Watt**	W -White B - Black	ACRYLIC C -Clear Prism W -White	N/A
	INCANDESCENT, MEDIUM BASE, 120V I260 - 2 X 60W	W -White B - Black	POLYCARBONATE C -Clear Prism W -White	P -Photocell LED LAMP, 3 YEAR WARRANTY, DIMMABLE LWE -A19/E26, 80CRI, 3000K LCE -A19/E26, 80CRI, 4000K
	GU24 BASE, 120V G213 -2 X 13W G218 -2 X 18W	W -White B - Black	ACRYLIC C -Clear Prism W -White	P -Photocell L -CFL, 2700K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

**ESTIMATED FROM LED SOURCE

90CRI OPTIONS AVAILABLE - SEE PAGE 112 FOR DIMMER COMPATIBILITY

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.