


- Available in LED, Incandescent & GU24
- Wall Mount Only
- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Standard Pack QTY: 6

## COLONIAL WALL



RoHS  
compliant

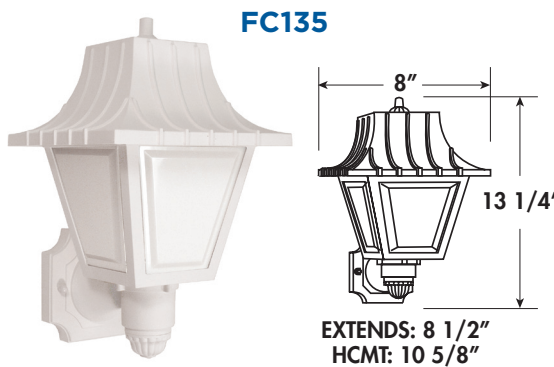

### EXAMPLE # FC135-LE800C-BCP

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
<b>FC134</b> <b>FC135</b>	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR	<b>W</b> -White <b>B</b> -Black	<b>ACRYLIC</b> <b>C</b> -Clear <b>W</b> -White <b>F</b> - Glare Free Frost	<b>P</b> -Photocell
	LE800 - 13W, 80 CRI <b>W</b> -1140lm 3000K >88 Lumens Per Watt** <b>C</b> -1280lm 4000K			
	<b>INCANDESCENT, MEDIUM BASE, 120V</b> <b>I60</b> -1 X 60W Max	<b>W</b> -White <b>B</b> -Black	<b>ACRYLIC</b> <b>C</b> -Clear <b>W</b> -White <b>F</b> - Glare Free Frost	<b>P</b> -Photocell  <b>LED LAMP, 3 YEAR WARRANTY, DIMMABLE, ENERGY STAR </b> <b>LWE</b> -A19/E26, 80CRI, 3000K <b>LCE</b> -A19/E26, 80CRI, 4000K
<b>GU24 BASE, 120V</b> <b>G13</b> -1 X 13W <b>G18</b> -1 X 18W <b>G26</b> -1 X 27W	<b>W</b> -White <b>B</b> -Black	<b>ACRYLIC</b> <b>C</b> -Clear <b>W</b> -White <b>F</b> - Glare Free Frost	<b>P</b> -Photocell <b>L</b> -CFL, 2700K	

\*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

\*\*ESTIMATED FROM LED SOURCE



Scan the QR code to the left to access the Energy Star qualified product list.

**90CRI OPTIONS AVAILABLE - SEE PAGE 112 FOR DIMMER COMPATIBILITY**

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.