


- Available in LED, Incandescent & GU24
- Fade & Rust Resistant Composite Construction
- Wall Mount Only
- UL Listed for Wet Locations
- Standard Pack QTY: 6



TUDOR WALL

FT151

1 PIECE BASE
HCMT: 10 1/2"

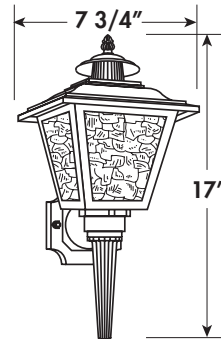

EXTENDS: 8"



RoHS
compliant



EXAMPLE # FT151-I60-BC-PTLWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FT151	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR LE800 - 13W, 80 CRI W -1140lm 3000K >88 Lumens Per Watt** C -1280lm 4000K	W -White B -Black	ACRYLIC C -Clear Femish	P -Photocell T - Brass Finial
	INCANDESCENT, MEDIUM BASE, 120V I60-1 X 60W Max	W -White B -Black	ACRYLIC C -Clear Femish	P -Photocell T - Brass Finial LED LAMP, 3 YEAR WARRANTY, DIMMABLE, ENERGY STAR LWE -A19/E26, 80CRI, 3000K LCE -A19/E26, 80CRI, 4000K
	GU24 BASE, 120V G13-1 X 13W G18-1 X 18W G26-1 X 27W	W -White B -Black	ACRYLIC C -Clear Femish	P -Photocell T - Brass Finial L -CFL, 2700K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

**ESTIMATED FROM LED SOURCE



Scan the QR code to the left to access the Energy Star qualified product list.

90CRI OPTIONS AVAILABLE - SEE PAGE 112 FOR DIMMER COMPATIBILITY

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.


- Available in LED, Incandescent & GU24
- Fade & Rust Resistant Composite Construction
- Wall Mount Only
- UL Listed for Wet Locations
- Standard Pack QTY: 6

TUDOR WALL



FT131

1 PIECE BASE
HCMT: 10 1/2"

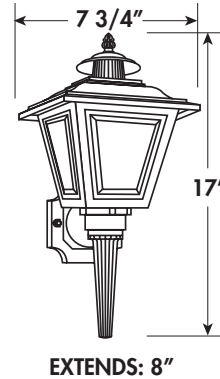

RoHS
compliant



EXAMPLE # FT131-I60-BW-PTLWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FT131	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR	W-White B-Black	ACRYLIC C-Clear W-White F- Glare Free Frost	P-Photocell T- Brass Finial
	LE800 - 13W, 80 CRI >88 Lumens Per Watt**	W-1140lm 3000K C-1280lm 4000K		
	INCANDESCENT, MEDIUM BASE, 120V I60-1 X 60W Max	W-White B-Black	ACRYLIC C-Clear W-White F- Glare Free Frost	P-Photocell T- Brass Finial LED LAMP, 3 YEAR WARRANTY, DIMMABLE, ENERGY STAR LWE-A19/E26, 80CRI, 3000K LCE-A19/E26, 80CRI, 4000K
	GU24 BASE, 120V G13-1 X 13W G18-1 X 18W G26-1 X 27W	W-White B-Black	ACRYLIC C-Clear W-White F- Glare Free Frost	P-Photocell T- Brass Finial L-CFL, 2700K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

**ESTIMATED FROM LED SOURCE



Scan the QR code to the left to access the Energy Star qualified product list.

90CRI OPTIONS AVAILABLE - SEE PAGE 112 FOR DIMMER COMPATIBILITY

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.