


- Available in LED, Incandescent & GU24
- Fade & Rust Resistant Composite Construction
- Wall Mount Only
- UL Listed for Wet Locations
- Standard Pack QTY: 1

## AMHERST WALL




**FA192**

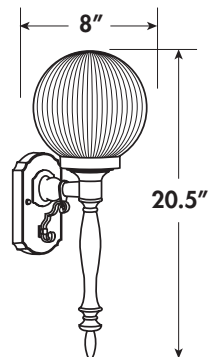

EXTENDS: 9"  
HCMT: 11 1/8"



**FA193**



EXTENDS: 9"  
HCMT: 11 1/8"



### EXAMPLE # FA192-I75-BW-PLWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
<b>FA192</b>	<b>INCANDESCENT, MEDIUM BASE, 120V</b>	<b>W</b> -White	<b>ACRYLIC</b>	<b>P</b> - Photocell
<b>FA193</b>	<b>I75-1 X 75W Max</b>	<b>B</b> - Black	<b>C</b> -Clear Prism <b>W</b> - White	<b>LED LAMP, 3 YEAR WARRANTY, DIMMABLE, ENERGY STAR</b> <b>LWE</b> -A19/E26, 80CRI, 3000K <b>LCE</b> -A19/E26, 80CRI, 4000K
	<b>GU24 BASE, 120V</b>	<b>W</b> -White	<b>ACRYLIC</b>	<b>L</b> -CFL, 2700K
	<b>G13</b> -1 X 13W <b>G18</b> -1 X 18W <b>G26</b> -1 X 27W	<b>B</b> - Black	<b>C</b> -Clear Prism <b>W</b> - White	<b>P</b> - Photocell

\*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

\*\*ESTIMATED FROM LED SOURCE



Scan the QR code to the left to access the Energy Star qualified product list.

SEE PAGE 112 FOR DIMMER COMPATIBILITY

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.