


- Available in LED, Incandescent & GU24
- Ceiling Mount
- Fade & Rust Resistant Composite Construction
- UL Listed for Damp Locations
- Standard Pack QTY: 6

OCTAGON

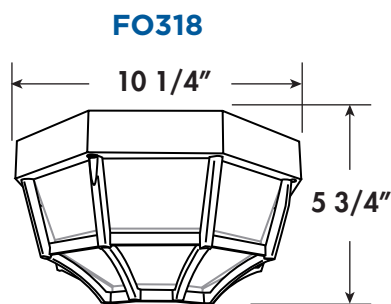

EXAMPLE # FO318-G13-WFL

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FO318	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR	W -White B - Black	ACRYLIC F -Glare Free Frost	N/A
	LE800 - 13W, 80 CRI >88 Lumens Per Watt**	W -1140lm 3000K C -1280lm 4000K		
	LE1200 - 14W, 80 CRI >102 Lumens Per Watt**	W -1430lm 3000K C -1500lm 4000K		
	LE1800 - 22W, 80 CRI >88 Lumens Per Watt**	W -1950lm 3000K C -2130lm 4000K		
	INCANDESCENT, MEDIUM BASE, 120V I75-1 X 75W Max	W -White B - Black	ACRYLIC F -Glare Free Frost	LED LAMP, 3 YEAR WARRANTY DIMMABLE, ENERGY STAR LWE -A19/E26, 80CRI, 3000K LCE -A19/E26, 80CRI, 4000K
GU24 BASE, 120V G13-1 X 13W G18-1 X 18W G26-1 X 27W	W -White B - Black	ACRYLIC F -Glare Free Frost	L -CFL, 2700K	

*DATA PER LM79/LM80/TM21 & IES FILES AVAILABLE UPON REQUEST **ESTIMATED FROM LED SOURCE



Scan the QR code to the left to access the Energy Star qualified product list.

90CRI OPTIONS AVAILABLE - SEE PAGE 112 FOR DIMMER COMPATIBILITY

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.