

EOS LED RETROFIT KITS

- **UL 1598 Classified Retrofit Kit**
- **AC Driver-On-Board Technology**
- **Data Per NVLAP Accredited Laboratory**
- **Electronic Dimming** (see page 112)
- **Energy Star CSD**
- **5 Year Warranty**
(LED-MOV1 required for outdoor applications)



RoHS
compliant



install video

SPECIFICATIONS

- Input Voltage: 120VAC; 50/60Hz
- 13W, 14W, 22W & 32W Models
- Available in 3000K or 4000K
- High power factor > 0.95
- Estimated 50,000 hrs L70
- Optical grade polycarbonate lens
- Installation options include key hole slots, nipple, or mounting holes
- Integrated aluminum heat sink with ground wire
- Can be used to comply with 2016 Title 24 part 6 High Efficacy LED Light Source Requirements In Outdoor Applications
- On board line surge protection
- Optional supplemental surge protection
- 18" 18 AWG Leads
- UL 1598 Classified
- FCC compliance Class B


MINIMUM DIMENSION REQUIREMENTS

- Diffuser: 14" x 14" x 3.75"
- Lamp Compartment Volume: 277 in³

LUMENS & CCT @ 80CRI

13W EOS RETROFIT
1140lm, 3000K = 81lm/W
1280lm, 4000K = 88lm/W
14W EOS RETROFIT
1430lm, 3000K = 102lm/W
1500lm, 4000K = 103lm/W
22W EOS RETROFIT
1950lm, 3000K = 88lm/W
2130lm, 4000K = 96lm/W
32W EOS LAMP
2700lm, 3000K = 84lm/W
2750lm, 4000K = 86lm/W

Photometrics available on request

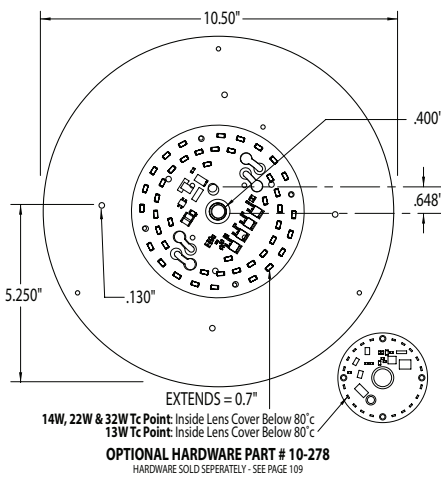

SL08-AC120R-W-M802PL
13W, 1140LM, 3000K



SL12-AC120R-W-M802PL
14W, 1430LM, 3000K



SL18-AC120R-W-M802PL
22W, 1950LM, 3000K



SL26-AC120R-W-M802PL*
32W, 2700LM, 3000K

SL08-AC120R-C-M802PL
13W, 1280LM, 4000K

SL12-AC120R-C-M802PL
14W, 1500LM, 4000K

SL18-AC120R-C-M802PL
22W, 2130LM, 4000K

SL26-AC120R-C-M802PL*
32W, 2750LM, 4000K

*SL26 MODELS ARE NOT ENERGY STAR QUALIFIED

PART NUMBER GUIDE

SL08 - AC120R - W - M802PL - M

OPTIONAL

SL08 13W
SL12 14W
SL18 22W
SL26 32W

AC120R 120V INPUT VOLTAGE
80CRI

W 3000K
C 4000K

M802PL HEAT SINK #

M LED-MOV1 SUPPLEMENTAL
SURGE PROTECTION SEE
PAGE 109