- Available in LED, Incandescent & GU24
- Fade & Rust Resistant Composite Construction
- Wall Mount Only
- UL Listed for Wet Locations
- Standard Pack QTY: 1

BRADFORD WALL

FB155

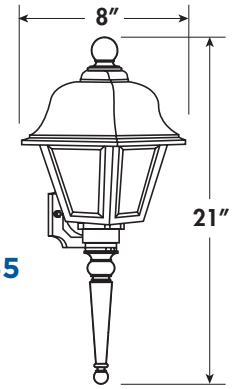

EXTENDS: 9″
HCMT: 11 7/8″

FB156



EXTENDS: 9″
HCMT: 11 7/8″

LED

MADE IN USA

c UL us

RoHS compliant

ASK ABOUT ENERGY STAR

EXAMPLE # FB156-LE800C-BWP

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FB155 **FB156**	**EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40˚C TO +40˚C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR** **LE800** - 13W, 80 CRI >88 Lumens Per Watt** **W**-1140lm 3000K **C**-1280lm 4000K	**W**-White **B**-Black	**ACRYLIC** **C**-Clear **W**-White **F**- Glare Free Frost	**P**-Photocell
	INCANDESCENT, MEDIUM BASE, 120V **I60**-1 X 60W Max	**W**-White **B**-Black	**ACRYLIC** **C**-Clear **W**-White **F**- Glare Free Frost	**P**-Photocell **LED LAMP, 3 YEAR WARRANTY, DIMMABLE, ENERGY STAR** **LWE**-A19/E26, 80CRI, 3000K **LCE**-A19/E26, 80CRI, 4000K
	GU24 BASE, 120V **G13**-1 X 13W **G18**-1 X 18W **G26**-1 X 27W	**W**-White **B**-Black	**ACRYLIC** **C**-Clear **W**-White **F**- Glare Free Frost	**P**-Photocell **L**-CFL, 2700K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

**ESTIMATED FROM LED SOURCE

Scan the QR code to the left to access the Energy Star qualified product list.

90CRI OPTIONS AVAILABLE - SEE PAGE 112 FOR DIMMER COMPATIBILITY

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply.

Specifications subject to change without notice. Printed in U.S.A. © 2020 Inter-Global Inc.